



**Features**

- \* LOW CURRENT REQUIREMENTS
- \* HIGH LIGHT OUTPUT
- \* RELIABLE AND RUGGED
- \* IC COMPATIBLE

**Absolute Maximum Ratings at T<sub>A</sub>=25°C**

REVERSE VOLTAGE (<100 μ A).....	4.0V
D.C. FORWARD CURRENT.....	30mA
PULSE CURRENT (1/10 DUTY CYCLE,0.1 ms PULSE WIDTH).....	100 mA
OPERATING TEMPERATURE RANGE.....	-25°C TO +85°C
STORAGE TEMPERATURE RANGE.....	-25°C TO +100°C
LEAD SOLDERING TEMP. (1.6mm FROM BODY).....	260°C FOR 5 SEC.

**PRELIMINARY**

**Eye Safety Information**

These LED devices are measured to be AEL Class 2 LED Products per IEC 825-1 and CENELEC EN60825-1 Standards when operated at the maximum data sheet dc drive current. For eye safety, do not stare into the light beam of these LED devices at close range.

**Electrical/optical characteristics at T<sub>A</sub>=25°C**

PART NUMBER	LED CHIP		LENS COLOR	WAVELENGTH TYP.		FORWARD VOLTAGE @20mA(V)		LUMINOUS INTENSITY @20mA(mcd)		VIEW ANGLE 2θ <sub>1/2</sub> (deg)
	MATERIAL	EMITTING COLOR		I <sub>F</sub> @20mA (nm)		TYP.	MAX.	MIN.	TYP.	
				λ p	λ d					
LT9C33-89-UC9T	AlGaInP	YELLOW	W.C.	592 ± 5	590 ± 5	2.2	2.8	3000	4000	15


(1) LENS COLOR

W.C....WATER CLEAR


(2) SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

(3) ALL ABOVE COMPONENTS ARE CONSIDERED . DEVIATIONS FROM STATED SPECIFICATIONS WILL REQUIRE A NEW PART NUMBER BE ASSIGNED .


**Package Dimensions**

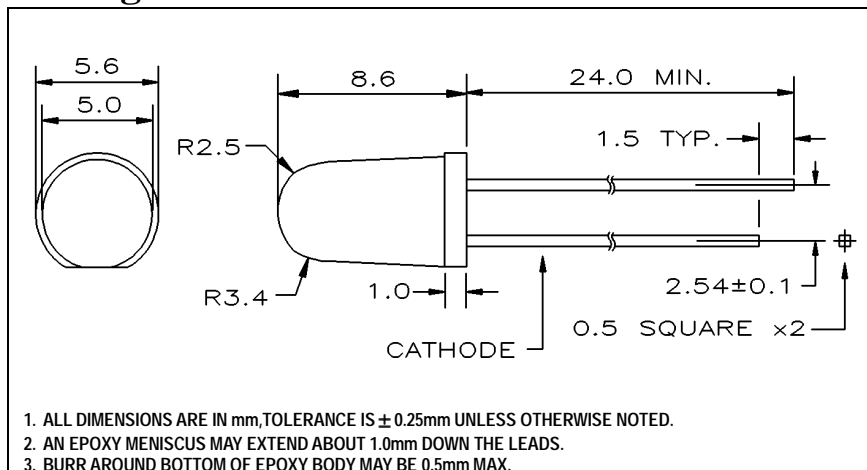


**Radiation Pattern**

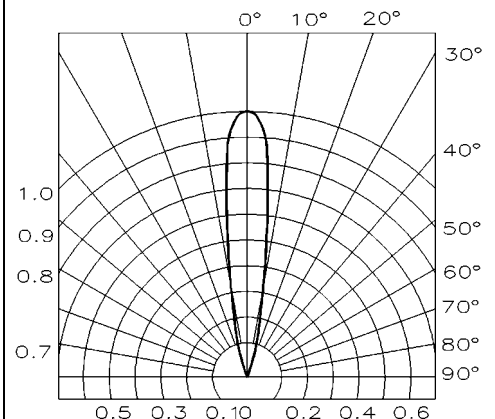


**Forward Current vs. Applied Voltage**

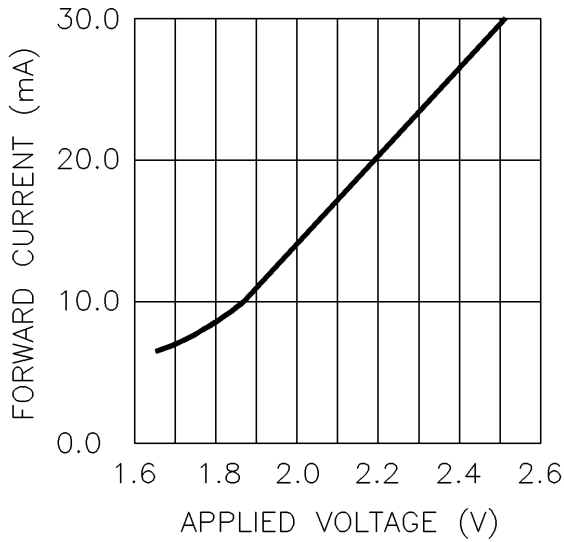

**Luminous Intensity vs. Forward Current**

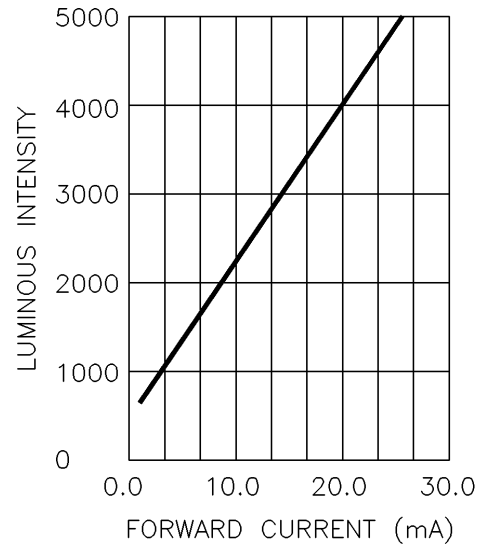

**Forward Current vs. Ambient Temperature**

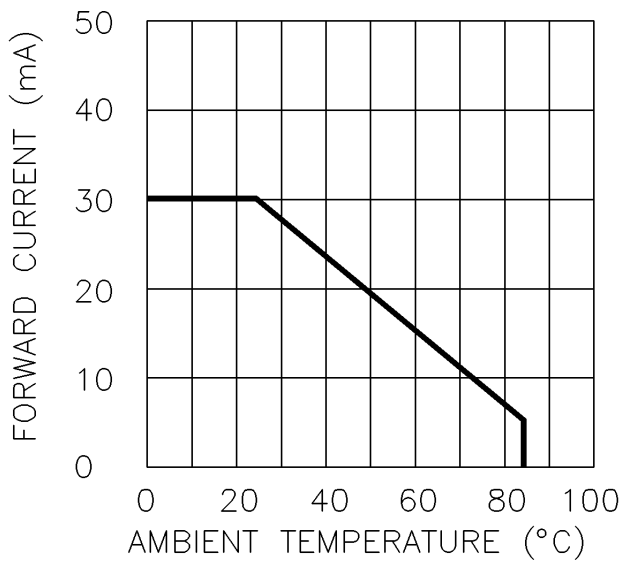

**Relative Intensity vs. Wavelength**

